

Gathering System Project



When Atlantic Midstream needed to install a new condensate pipe line they chose Flexpipe's Flexcord for its reliability and ease of installation.

Atlantic Midstream had a low pressure condensate line for a gathering system project and chose Flexcord for this

Location:

- Pecos, Texas, United States

Situations:

- To install a 30 mile (48 kilometer) condensate line for a gathering system project

Products:

- 3" Flexcord (FC801)

Services:

- Linepipe installation and supervision


Results:

- Fast, safe and cost-effective installation with future high-pressure capability if needed

application. It was installed directly over a 12" high-pressure gas line that was separated by dirt and sand fill. They chose Flexcord for various reasons including:

- its exceptional strength integrity and high-pressure capability if needed in the future
- the durability of the pipe and no corrosion issues
- ease of installation and lower labour costs
- time savings from a quicker and safer installation



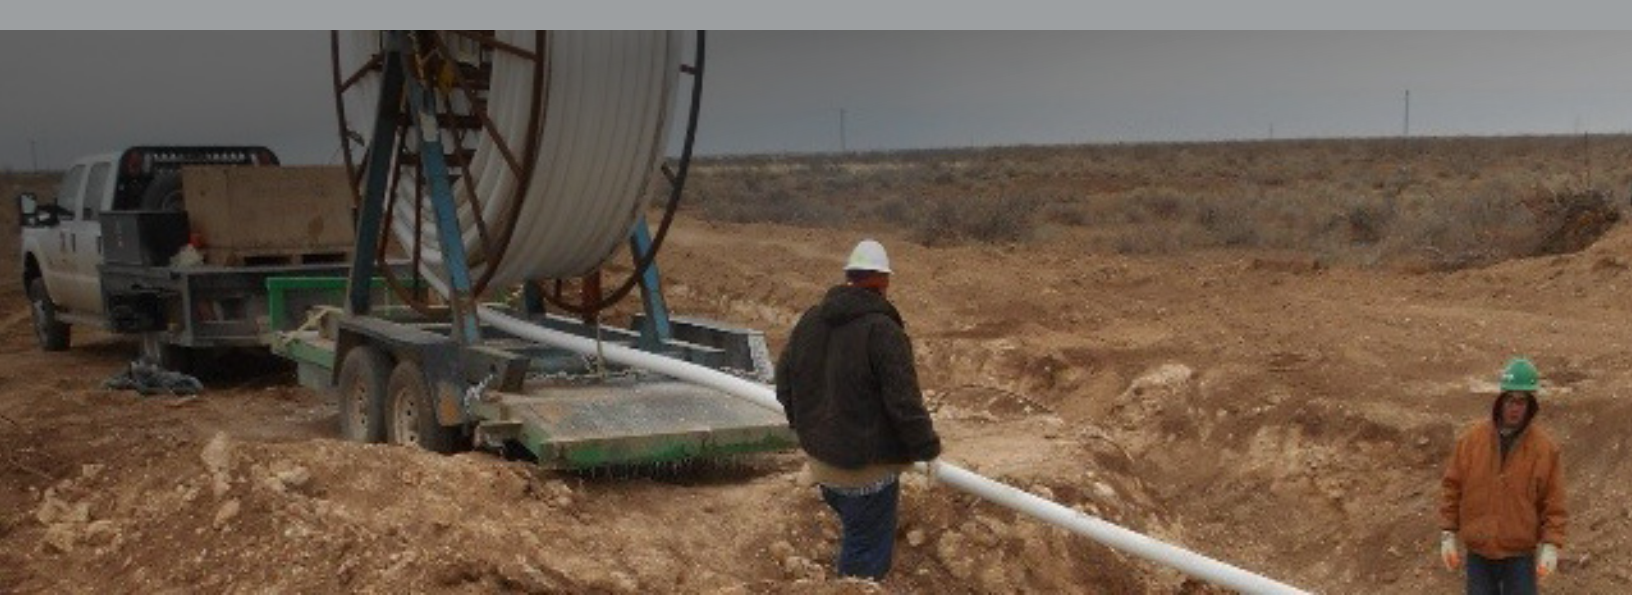

- extremely reliable hydraulically crimped joints that are leakage free

Overall, they were very satisfied with how easy Flexcord was to install, its flexibility and the long lengths between coupling connections.

“Flexcord is a great product, it’s a dependable, cathodically-free pipeline and Flexpipe provides exceptional customer service. We are installing a first grade product with no issues of corrosion for the future.” - Terry Gregson, VP Construction & Projects, Atlantic Midstream.